


# Ultrafast Recovery Modules

## UFT125, 126 & 127

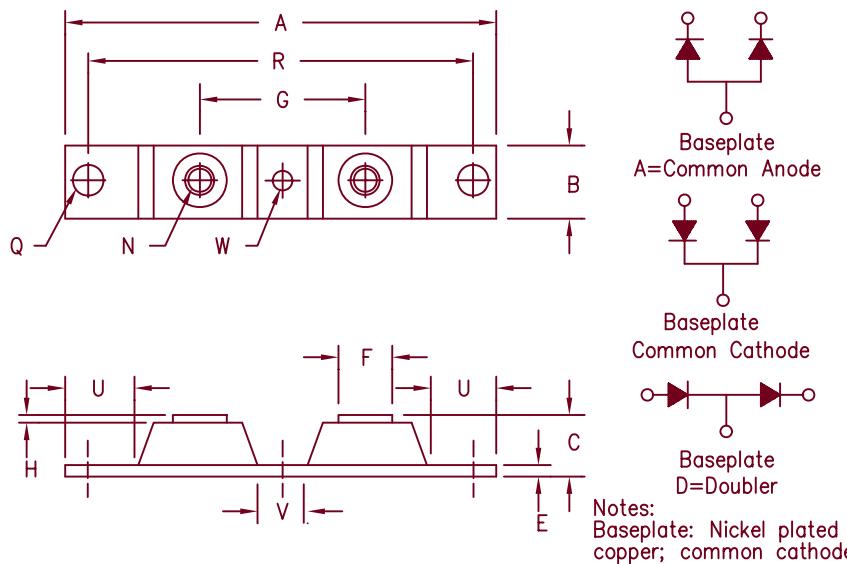

Dim. Inches		Millimeters		
Min.	Max.	Min.	Max.	Notes
A	---	3.630	---	92.20
B	0.700	0.800	17.78	20.32
C	---	0.630	---	16.00
E	0.120	0.130	3.05	3.30
F	0.490	0.510	12.45	12.95
G	1.375	BSC	34.92	BSC
H	0.010	---	0.25	---
N	---	---	---	---
Q	0.275	0.290	6.99	7.37
R	3.150	BSC	80.01	BSC
U	0.600	---	15.24	---
V	0.312	0.340	7.92	8.64
W	0.180	0.195	4.57	4.95
				Dia.

Microsemi Catalog Number	Working Reverse Voltage	Peak Reverse Voltage
UFT12505*	50V	50V
UFT12510*	100V	100V
UFT12515*	150V	150V
UFT12520*UFT12620*	200V	200V
UFT12630*	300V	300V
UFT12640*	400V	400V
UFT12650*	500V	500V
UFT12760*	600V	600V
UFT12770*	700V	700V
UFT12780*	800V	800V

Add Suffix A for Common Anode, D for Doubler

- Ultra Fast Recovery
- 175°C Junction Temperature
- $V_{RRM}$  50 to 800 Volts
- 120 Amps Current Rating
- 2 X 60 Amp current rating

### Electrical Characteristics

	UFT125	UFT126	UFT127	
Average forward current per pkg	$I_F(AV)$	120A	120A	Square Wave
Average forward current per leg	$I_F(AV)$	60A	60A	Square Wave
Case Temperature	$T_C$	130°C	115°C	$R_{\theta JC} = 0.85^{\circ}\text{C}/\text{W}$
Maximum surge current per leg	$I_{FSM}$	800A	700A	8.3ms, half sine, $T_J = 175^{\circ}\text{C}$
Max peak forward voltage per leg	$V_{FM}$	.975V	1.25V	$I_{FM} = 60\text{A}, T_J = 25^{\circ}\text{C}^*$
Max reverse recovery time per leg	$t_{rr}$	40ns	60ns	$1/2\text{A}, 1\text{A}, 1/4\text{A}, T_J = 25^{\circ}\text{C}$
Max peak reverse current per leg	$I_{RM}$	2.0ma	—	$V_{RRM}, T_J = 125^{\circ}\text{C}^*$
Max peak reverse current per leg	$I_{RM}$	30μa	—	$V_{RRM}, T_J = 25^{\circ}\text{C}$
Typical Junction capacitance	$C_J$	270pF	200pF	$V_R = 10\text{V}, T_J = 25^{\circ}\text{C}$

\*Pulse test: Pulse width 300 usec, Duty cycle 2%

### Thermal and Mechanical Characteristics

Storage temp range	$T_{STG}$	-55°C to 175°C
Operating junction temp range	$T_J$	-55°C to 175°C
Max thermal resistance per leg	$R_{\theta JC}$	0.85°C/W Junction to case
Max thermal resistance per pkg	$R_{\theta JC}$	0.425°C/W Junction to case
Typical thermal resistance	$R_{\theta CS}$	0.08°C/W Case to sink
Terminal Torque		35-50 inch pounds
Mounting Base Torque - outside holes		30-40 inch pounds
Mounting Base Torque - (center hole)		8-10 inch pounds
center bolt must be torqued first		
Weight		2.8 ounces (75 grams) typical

# UFT125

Figure 1  
Typical Forward Characteristics – Per Leg

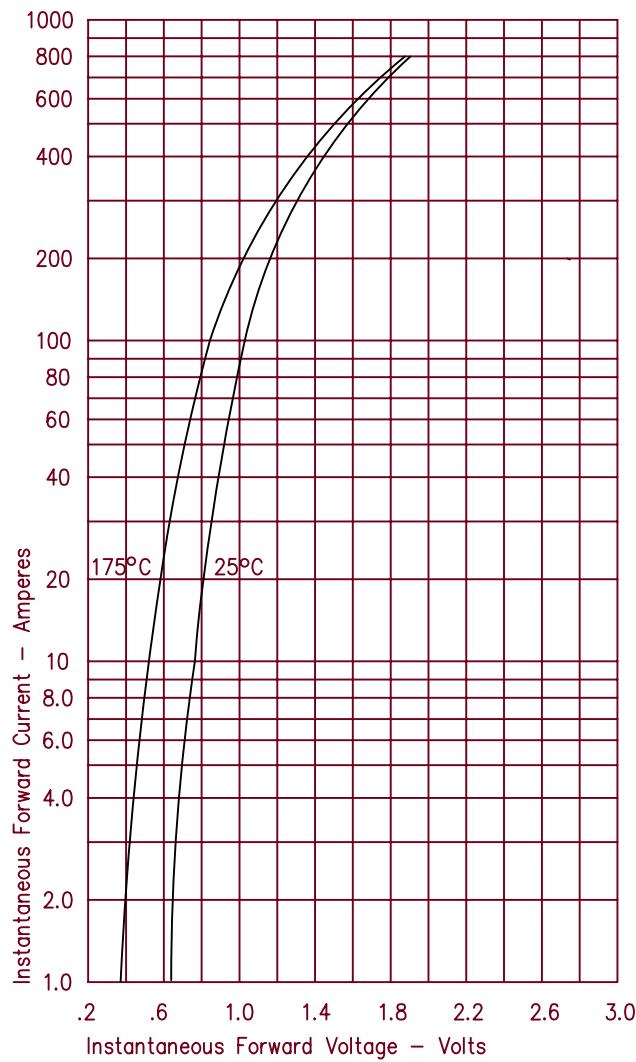


Figure 2  
Typical Reverse Characteristics – Per Leg

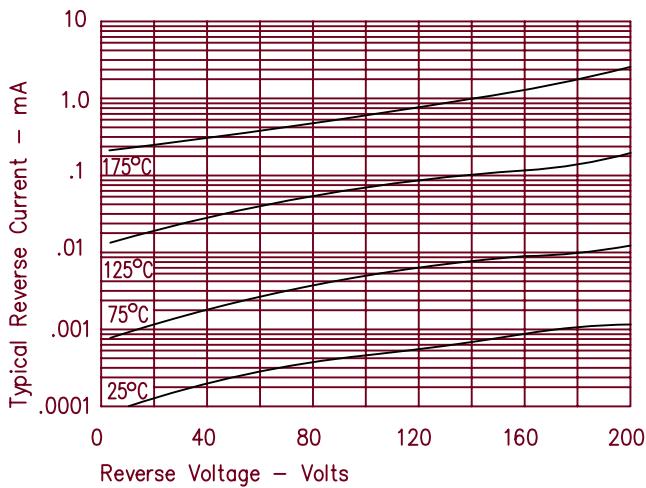


Figure 3  
Typical Junction Capacitance – Per Leg

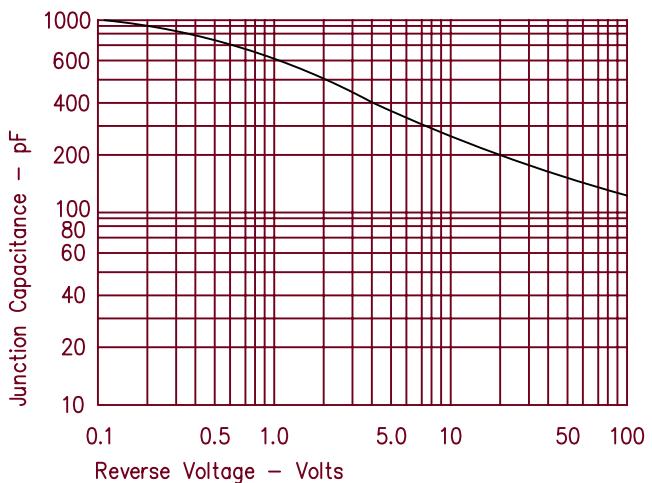


Figure 4  
Forward Current Derating – Per Leg


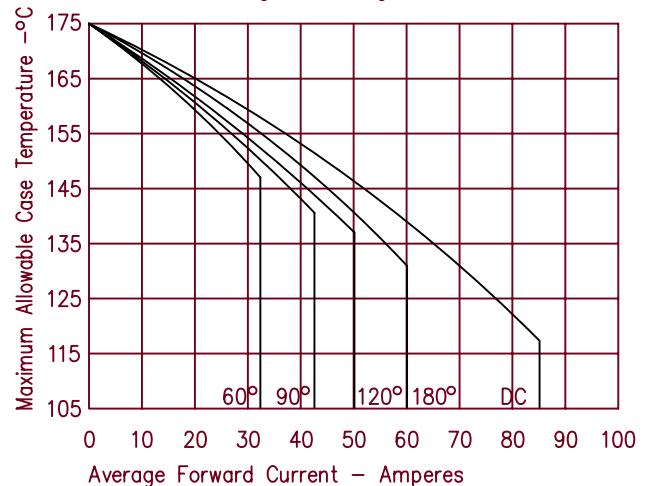


Figure 5  
Maximum Forward Power Dissipation – Per Leg

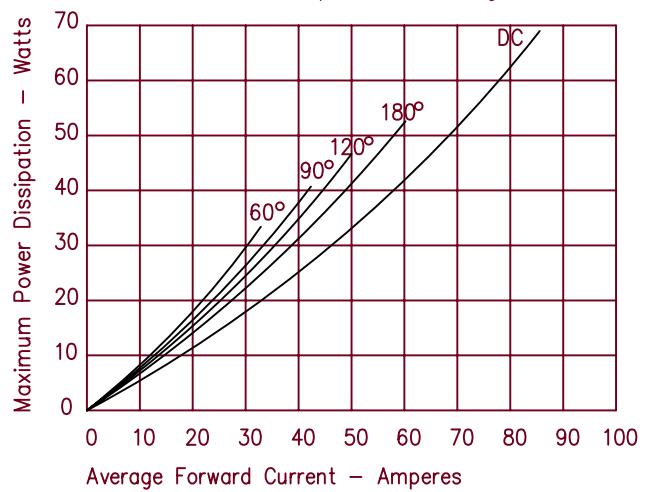

# UFT126

Figure 1  
Typical Forward Characteristics – Per Leg

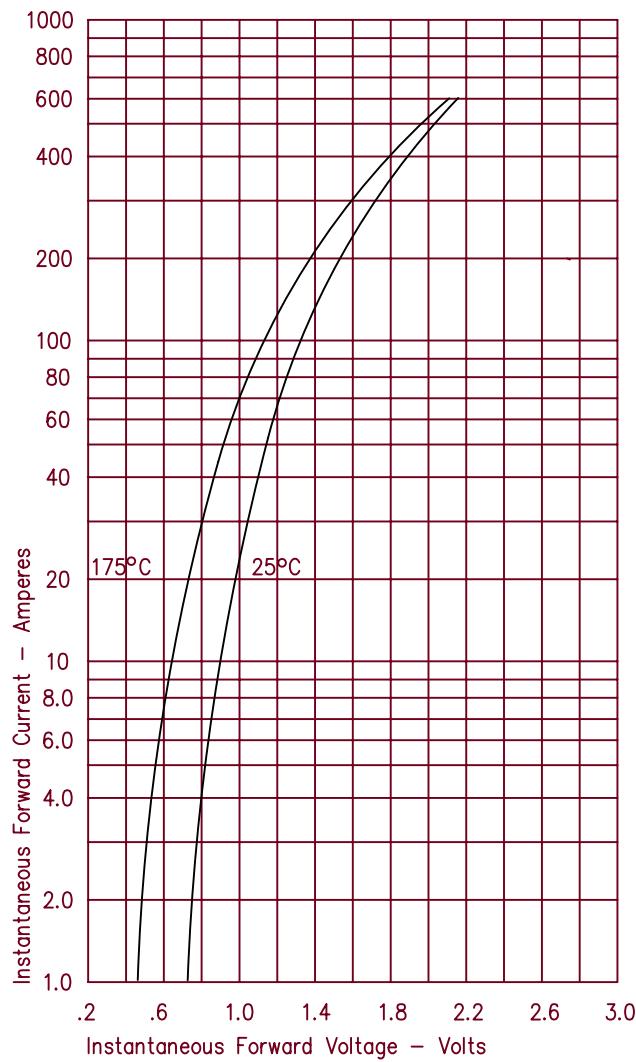


Figure 2  
Typical Reverse Characteristics – Per Leg

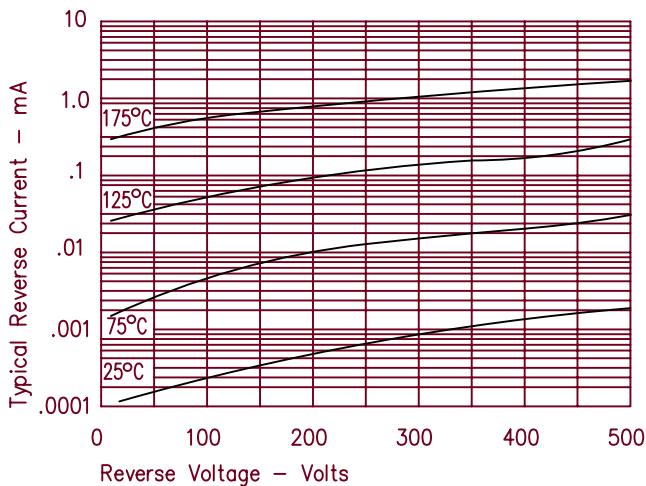


Figure 3  
Typical Junction Capacitance – Per Leg

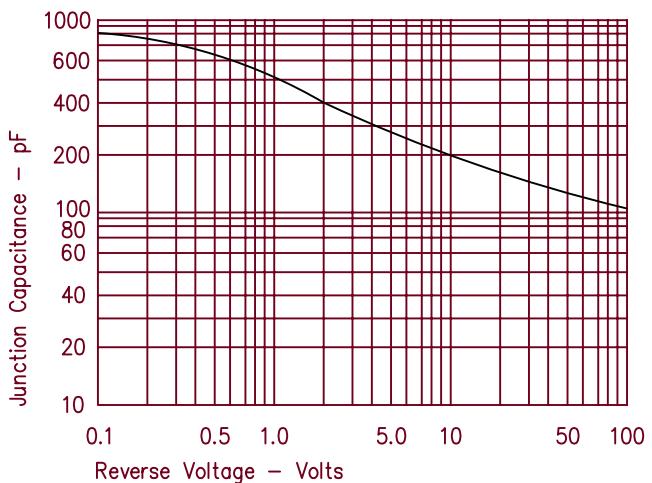


Figure 4  
Forward Current Derating – Per Leg


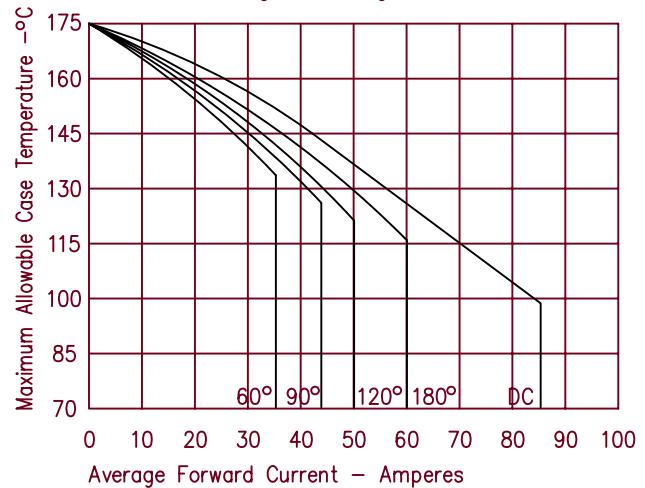


Figure 5  
Maximum Forward Power Dissipation – Per Leg

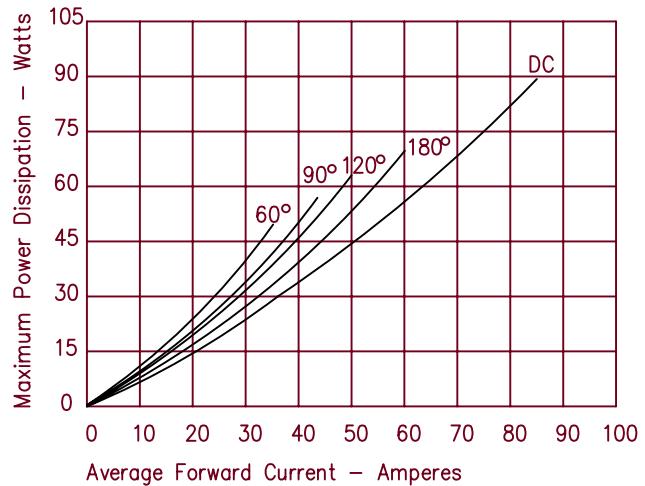

# UFT127

Figure 1  
Typical Forward Characteristics – Per Leg

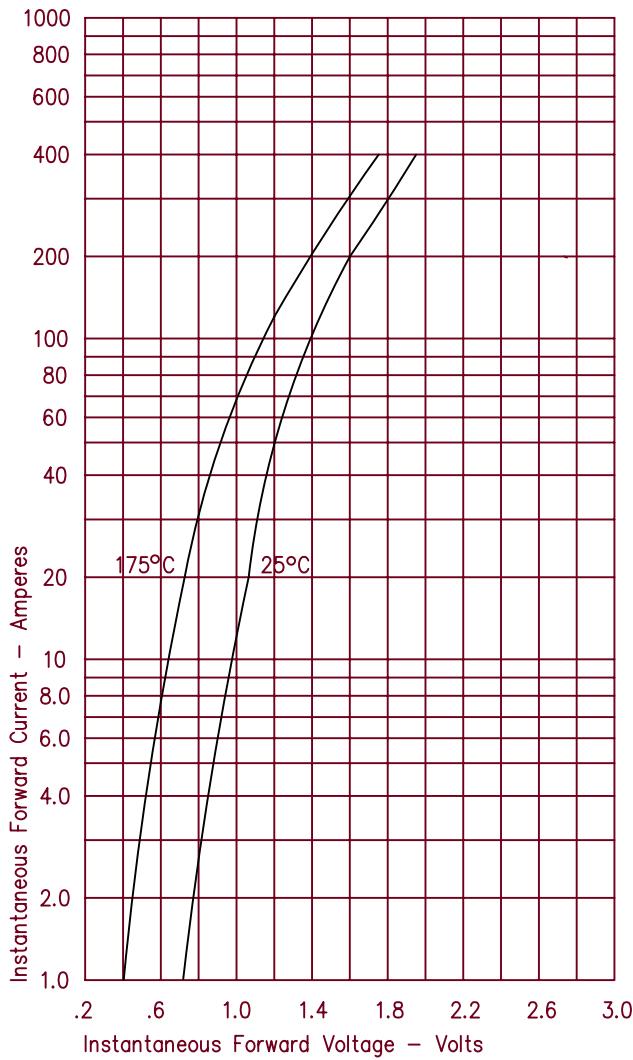


Figure 2  
Typical Reverse Characteristics – Per Leg

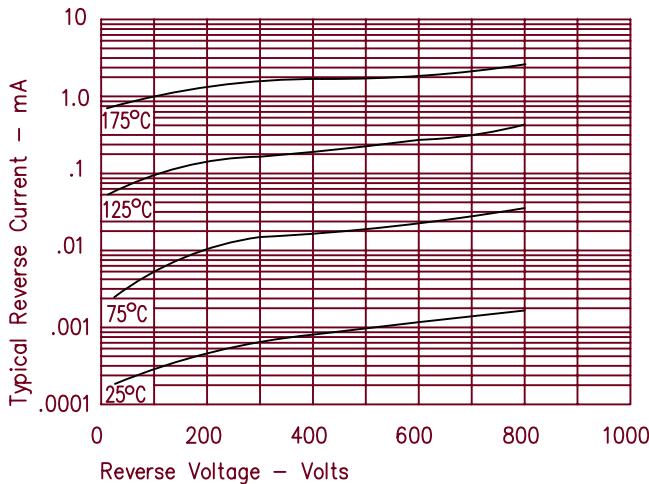


Figure 3  
Typical Junction Capacitance – Per Leg

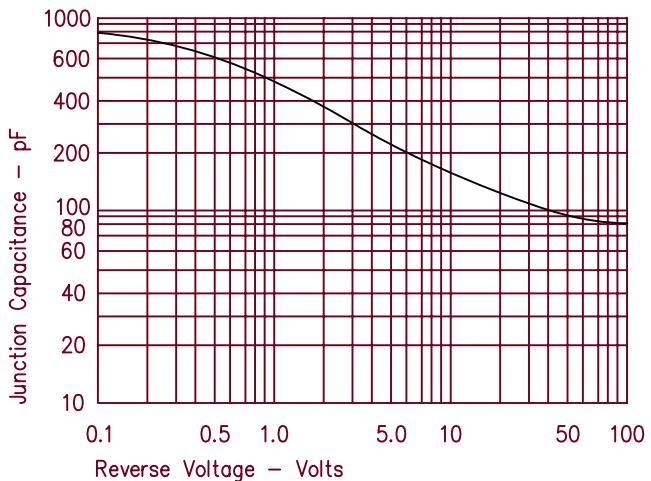


Figure 4  
Forward Current Derating – Per Leg

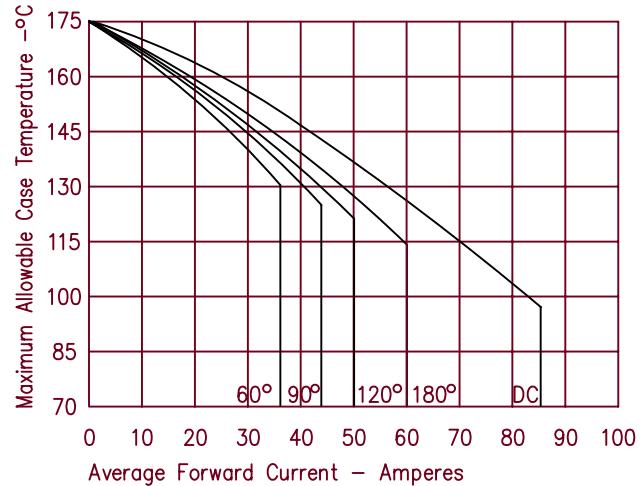


Figure 5  
Maximum Forward Power Dissipation – Per Leg

